




Nintendo 64 Motherboard Replacement

Install replacement motherboard

Written By: [tonymag28](#)

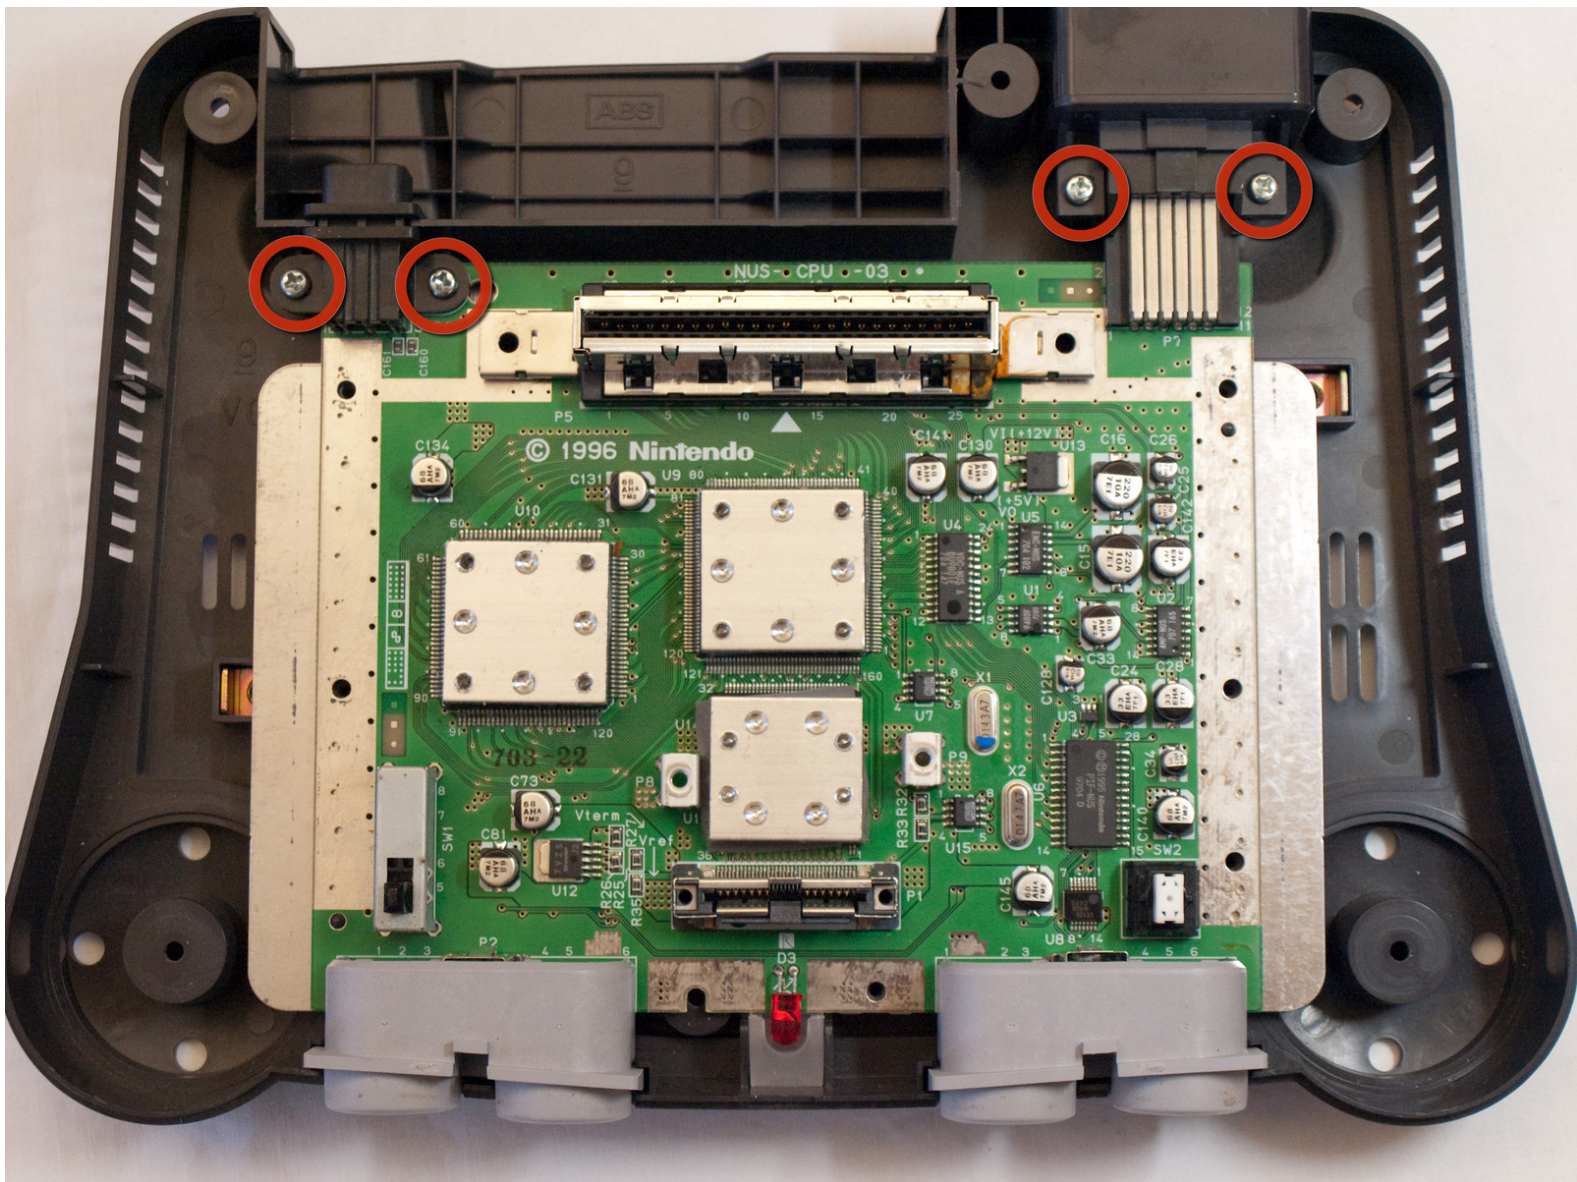

INTRODUCTION

This guide will show how to replace the Nintendo 64 motherboard.

TOOLS:

- [4.2mm gamebit](#) (1)
 - [Metal Spudger](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Top Cover



- Remove the expansion pack cover by pushing in the tab and pulling out.

Step 2



- Lever the expansion pack out using the metal spudger.
- ⓘ A small spoon can be used in place of a spudger.

Step 3



- Remove the six screws on the bottom side indicated in the example with a gamebit head or screwdriver.

Step 4





- Remove the two front feet of the N64.

Step 5





- Rotate to top side up and lift off top cover.

Step 6 — Metal Plate

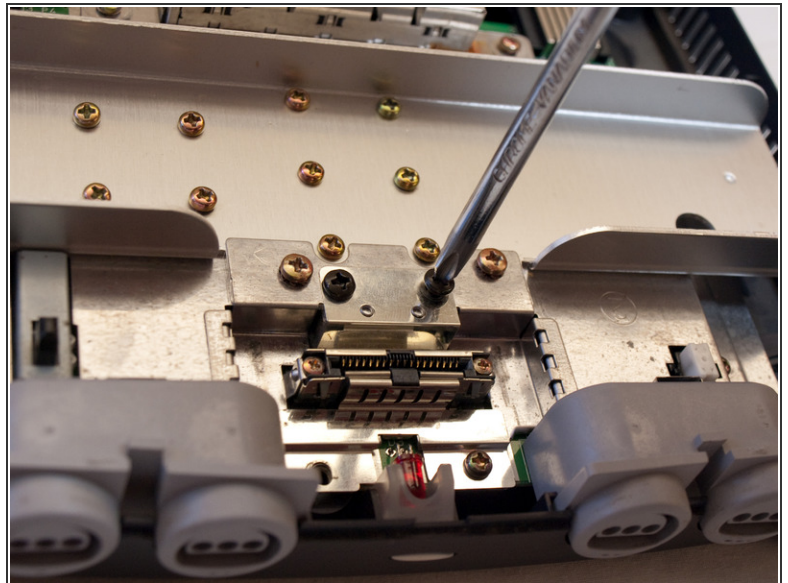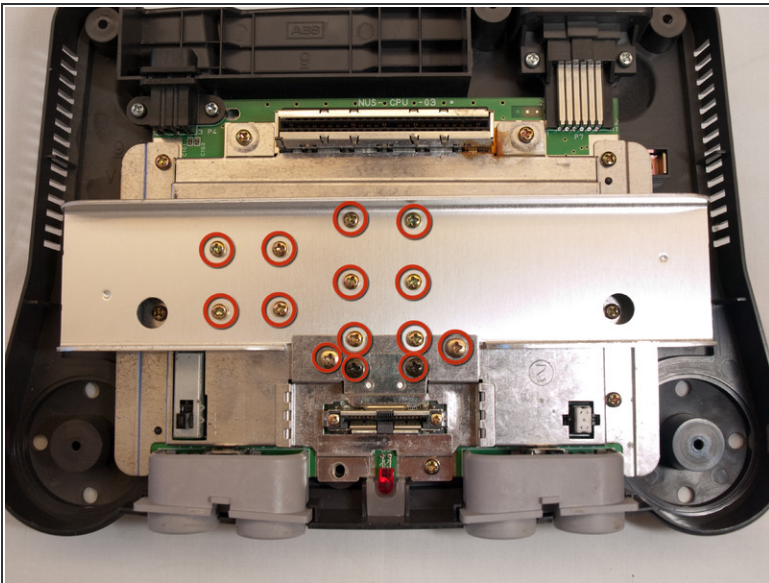


- Remove the fourteen screws indicated in the example using the larger Phillips screwdriver.

Step 7

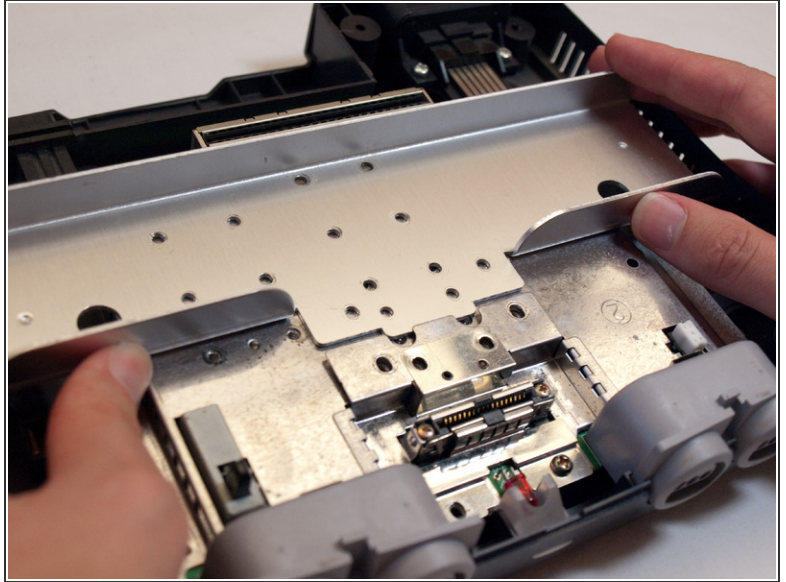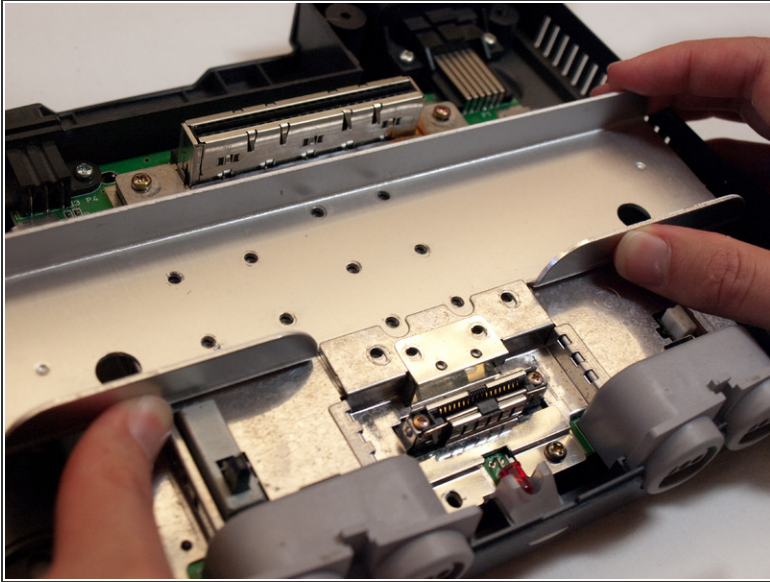


- Remove the metal plate indicated in the example by sliding it back and then lifting it up.

Step 8

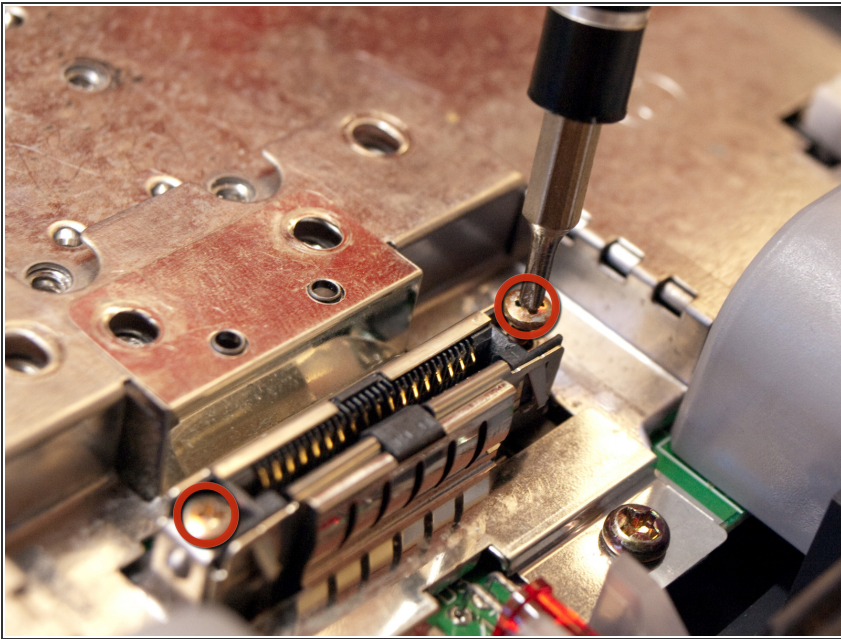


- Remove the two screws indicated in the example using the smaller Phillips screwdriver.

Step 9

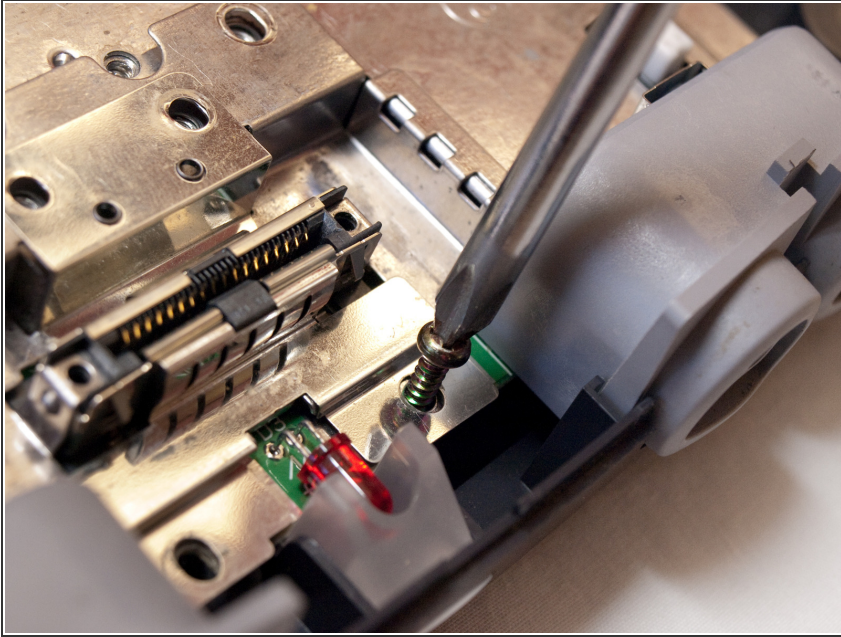



- Remove the screw to the right of the LED light using the larger Phillips screwdriver.

Step 10

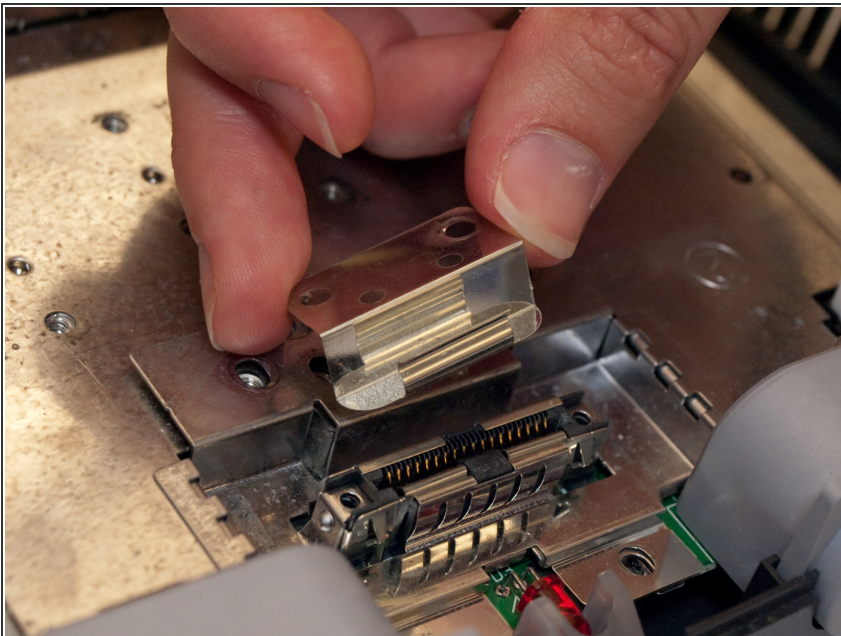



- Remove the small metal bracket from the back of the expansion pack slot.

Step 11

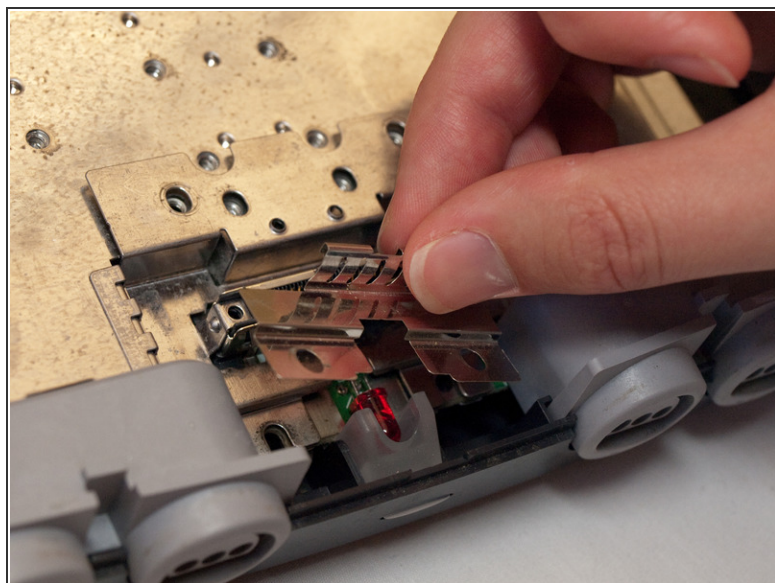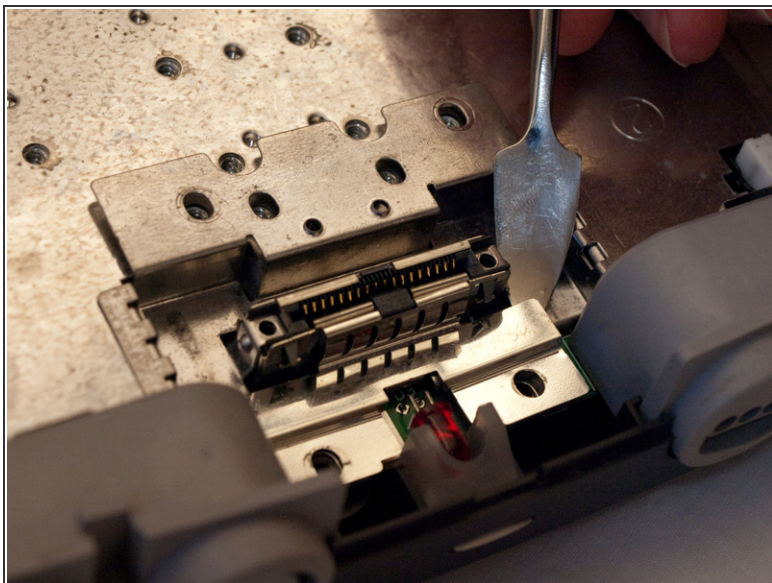



- Remove the small metal bracket from the front of the expansion pack slot with the metal spudger.

Step 12

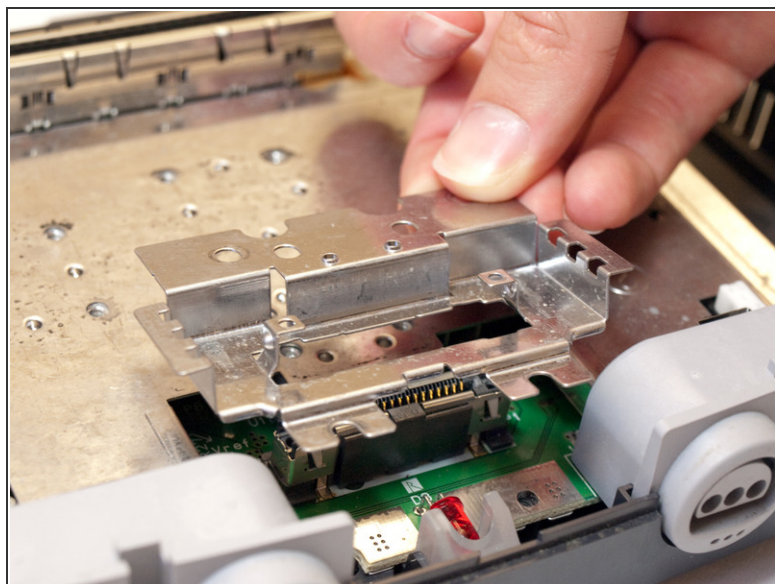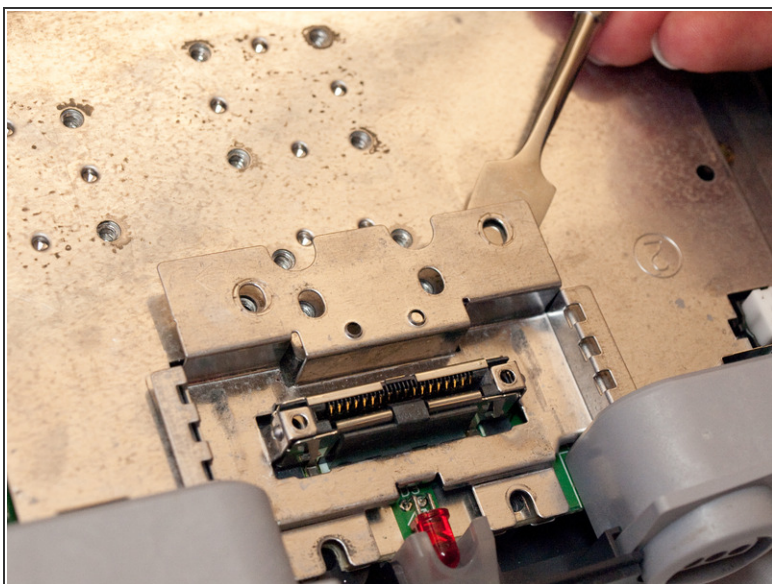


- Remove the small metal bracket behind the expansion slot using the spudger.

Step 13

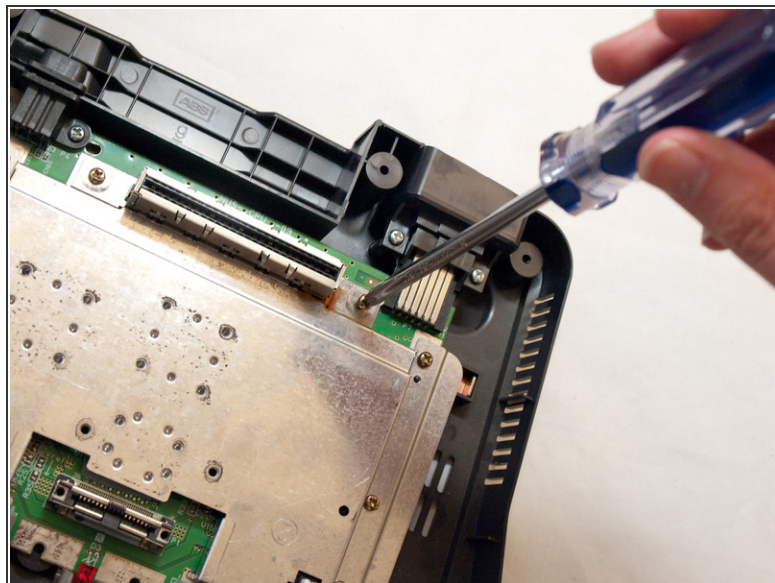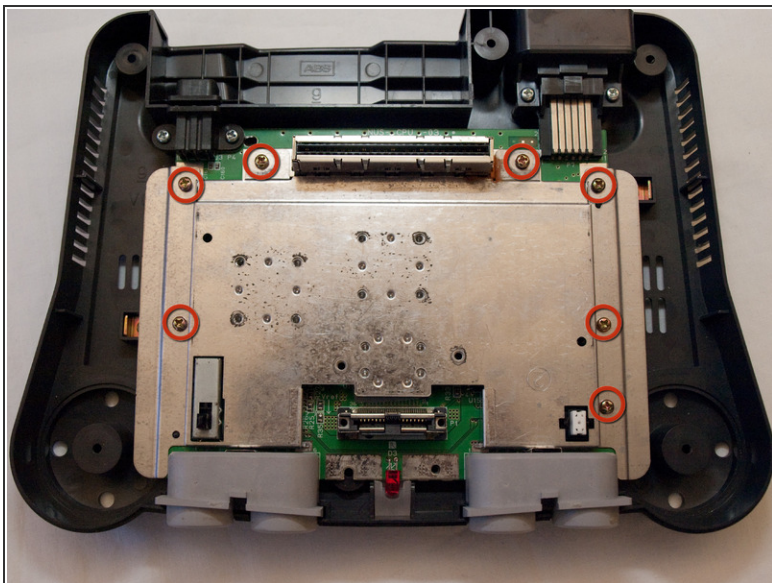


- Remove the seven screws indicated in the example using the larger Phillips screwdriver.

Step 14

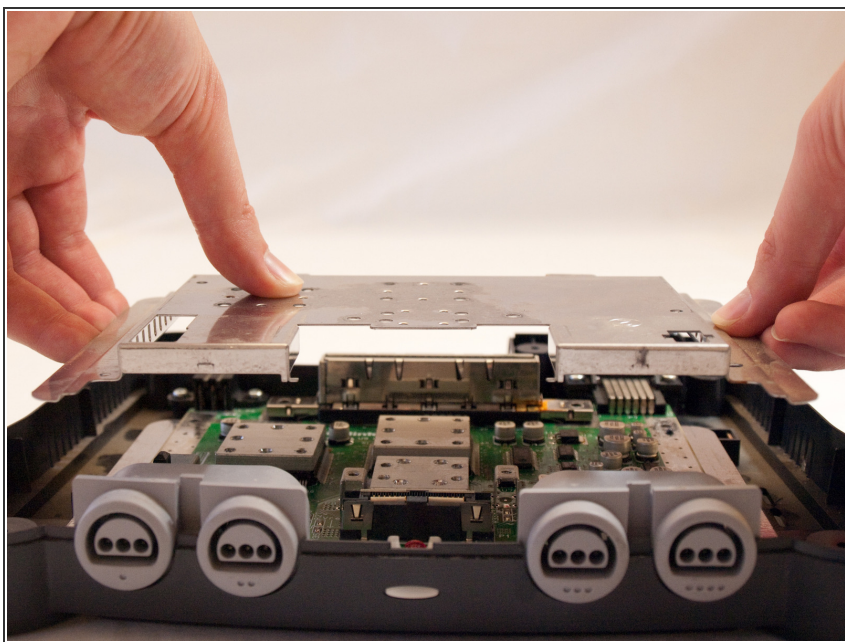


- Lift off and remove the metal plate as indicated in the example.

Step 15 — Motherboard

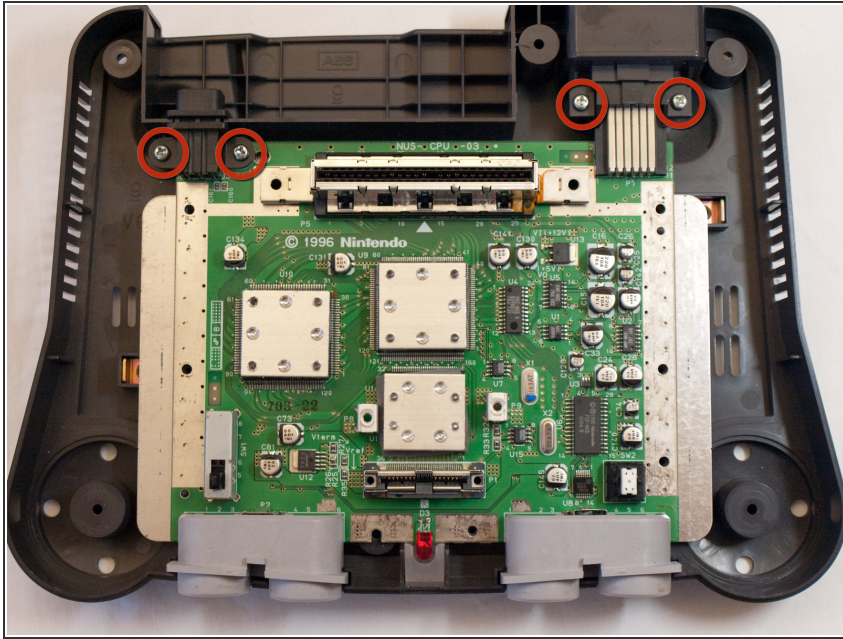

- Remove the four screws indicated using the #1 Phillips screwdriver.

Step 16 — Motherboard removal

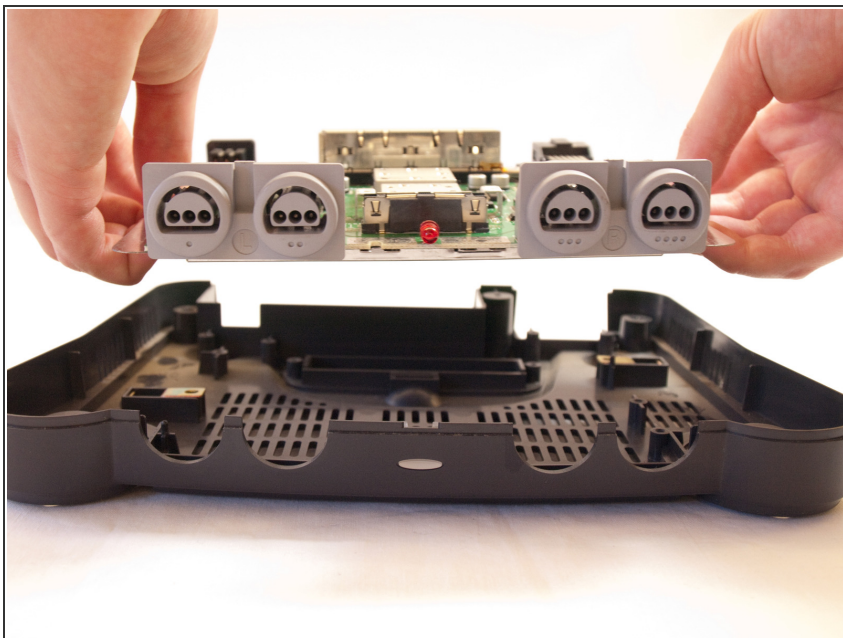

- Lift up and remove the motherboard.

To reassemble your device, follow these instructions in reverse order.